

Front Garage Zero Lot Line Home Architectural Design Guidelines

JANUARY 13, 2020

Contents



DIREC	TORY		3
1.0	OBJE	ECTIVE	4
2.0	CON	NCEPT	4
3.0	HOU	JSING DESIGN	5
	3.1	House Size	5
	3.2	Repetition	5
	3.3	Corner Lots	5
	3.4	High Visibility Lots	5
	3.5	Site Planning And Grading	5
4.0	EXTE	ERIOR FINISHES	6
	4.1	Primary Finish	6
	4.2	Trim Materials	6
	4.3	Parging	6
	4.4	Exterior Colours	6
	4.5	Roofing	7
	4.6	Windows / Doors	7
	4.7	Garage / Driveway / Walkway	7
5.0	LAN	DSCAPING	8
	5.1	Landscaping Deposit	8
	5.2	Landscaping Requirements	8
	5.3	Fencing	8
6.0	INTE	RPRETATION	9
7.0	SITIN	NG	9
	7.1	Consultant	9
	7.2	Set Back	9
	7.3	City Regulations	9
	7.4	Grading	9
	7.5	Plot Plans	9
8.0	SUBE	DIVISION APPEARANCE	10
	8.1	Signage	10
	8.2	Excavation Material	10
	8.3	Clean Up	10
	8.4	Construction Activity	10
9.0	APPR	ROVAL PROCESS	11
10.0	DAM	1AGE DEPOSITS	12
	10.1	Damage Deposit Return Procedure	12
APPEN	IDIX 'A' -	- Мар	13
APPEN	IDIX 'B' -	- Roofing	14
APPEN	IDIX 'C'	- Lot Inspection Report	15
APPEN	IDIX 'D'	- Application Form	16
APPEN	IDIX 'E' -	- Fencing Details	17
APPEN	IDIX 'F' -	- Final Inspection Report	18

Directory



Developer	Anthem	Ph: Edmon com	780-421-7272 ton@anthemproperties.	Emily Dyck	412 10339 - 124 Street Edmonton, AB T5N 3WI
Engineers	WSP	Ph:	780.423.8272	Dawn Taylor	10909 Jasper Ave Edmonton, AB T5K 0K9
Architectural Applications	Windward Landtec Inc.		780-454-6799 780-454-6896 rindwardlandtec.com indwardlandtec.com	Ray Jacobson	12128 - 121A Street Edmonton, AB T5L 0A4
Surveyor	Stantec Geomatics	Ph:	780.917.8850	Joel Corcoran	10160 - 112 St Edmonton, AB T5K 2L6
Solicitor	Combe &Kent	Ph: Fax:	780-425-4666 780-425-9358	Bob Kent	10614 – 124 Street Edmonton, AB T5N 1S3

Objective | Concept



1.0 OBJECTIVE

The following Architectural Guidelines have been compiled to assist you in problem free construction. We have taken steps to ensure that this information and engineering plans cover all aspects of design and construction in an effort to minimize problems prior to construction. The objective of these architectural directives is to achieve the highest possible standard of VISUAL APPEAL in this subdivision for the immediate and long-term benefit to you the Purchaser.

2.0 CONCEPT

The Architectural Guidelines are designed to provide visual control for the building massing, siting, style and colour, and to obtain the best possible streetscape appearance. Alternate exterior treatments may be requested to reinforce the streetscape. Emphasis will be concentrated on trying to create a strong "CURB APPEAL" to each home through attention to detail on the front elevation.

A heavily landscaped front yard will be a requirement to ensure a mature streetscape for the neighbourhood.

Housing Design



3.0 HOUSING DESIGN

Because of a wide variety and individual taste in house types in any development, care must be taken to incorporate these unique values into our development, giving special attention to each home's relationship with neighbouring properties.

To achieve the highest possible standard of visual appeal, a requirement for architectural detailing and continuity will apply to all homes. The natural landscape setting and history of the area provides for the perfect setting for this collection of Arts and Crafts / Craftsman, Heritage, Tudor, and Prairie. Additional style presentations will be reviewed for acceptance to include Modern Interpretations of the Traditional Styles. The architectural themes we have selected provide elements that can be incorporated in a diverse range of styles, in a variety of applications. This framework will encourage originality and individual expression while the pattern of coordinated components and features establish the character of McConachie. These elements will include strong entrance treatments, the use of window grills and trim boards. The use of design elements particular to each style is required, but all plans will be reviewed on their own merits. Stucco exteriors will be considered on an individual basis with consideration for the appropriate detailing and style.

3.1 HOUSE SIZE

Houses are to have a consistency of mass within the streetscape. As such, house widths and sizes must relate proportionately and logically to the lot width and neighbouring houses. The minimum house width is 22'-0". The minimum entry width will be 4'-0". Minimum house sizes shall be in accordance with the Land Use By-Law for the City of Beaumont. Individual homes will be reviewed on their own merits of design, massing, proportion and compatibility.

3.2 REPETITION

Identical front elevations may not be duplicated within 2 lots from each other and shall not be directly across the street from each other (XOAX), unless significant changes have been made to the house style, roof pitch and exterior materials to the satisfaction of the Architectural Consultant.

3.3 CORNER LOTS

Houses on corner lots require special design consideration. Flanking side elevations and rear elevations should carry details consistent with the front elevation, and avoid large expanses of blank wall space. House should have roof lines predominately sloped towards both streets. Bungalows and side splits are recommended, however, all model types will be considered within the foregoing criteria.

3.4 HIGH VISIBILITY LOTS

The rear elevation of homes on all perimeter lots (major roadways, green space, walkways,) will require wall openings of a number and size appropriate to the area of wall surface and suitable overhangs at cantilevers, box-outs and bay windows. In addition rooflines may be required to prevent a three-story presence. The distance from grade to the first eave line should not be more than 20'. Decks are to be constructed concurrently. An element of detail is to be included on these elevations to match the front elevation and overall design, i.e. Louver, grills, trims, or shadow bands, similar to the trim detailing on the front of the home.

3.5 SITE PLANNING AND GRADING

Site planning and grading must accommodate the natural slope of the land and variations in grade absorbed within the building mass as much as possible. Lot grading must be in strict conformance with the approved grading plan for the subdivision.

Front entry steps are to be a maximum of three risers per set. Where the grade calls for more than three risers, the run must be split. Exceptions to this requirement may be granted in consideration of unique design, topography and lateral bracing concerns. If there are more than 3 risers per set, the step will be a minimum 4' wide with appropriate railing style.



4.0 EXTERIOR FINISHES

4.1 Primary Finish

Acceptable Cladding materials include:

- Double 4/5 beveled, cove or traditional vinyl siding in a horizontal application
- Brick, stone or shale in stacked application in a panel form
- Stucco of sand float finish only (subject to acceptable detailing and colour)
- Hardboard siding, prefinished (long life) siding in a horizontal application
- Fieldstone and Stone tile will be considered on an individual basis

4.2 Trim Materials

To achieve the standard and caliber of visual appeal, a requirement for architectural detailing and continuity will apply to all homes.

The use of window and door surrounds will be a feature on all homes. Trims will be a minimum of 6°. In addition, all front gable end roofs will have minimum 6°shadow bands. Exterior Finishing and trim details must be consistent with the applicable style.

Where columns or posts are used on the front or highly visible elevations, they are to be of substantial form and solid in appearance. Columns and posts should include suitable details at top and bottom.

Windows and grill patterns must be consistent with the particular style.

All exposed gables must be detailed with alternate wall finish, ex – Shakes, Panel, Board and Batten.

Brick or stone work, when used, will be required in a panel format on the front of the home. Brick or stone applied as an accent may be permitted. Brick shall return a minimum of 24`around corners.

If appropriate to the design, brick or stone may be substantially applied to no less than 75% of the wall height c/w soldier course or heavy trim at the top to achieve the minimum requirement (i.e. 8`wall height will require brick or stone installation height of 6`).

In addition, the verandahs and/or porch must be enclosed to grade. Lattice will not be permitted and pre-cast steps will not require stone cladding. Risers must be closed back.

All exposed wood (including PWF) must be stained out to match the wall colour or trim colour.

All flues (when used) are to be contained in a corbelled chase with the same finish and detailing as the house.

4.3 Parging

Maximum height of parging on all elevations shall be 2'0" above grade and 1"-0" at the front of the home.

4.4 Exterior Colours

All homes must incorporate the use of two colours other than roof. In order to avoid repetition, identical primary colours may not be duplicated on adjacent lots or directly across the street. The use of a third accent colour is encouraged.

Exterior Finishes



4.5 Roofing

Roof materials are to be asphalt shingles. Minimum roof pitch and roof overhangs are as per each style. Reduced overhangs may be allowed if they are proportionate to the design of the home at the discretion of the Architectural Consultant. The minimum fascia size will be 8". The rooflines on any house must be consistent or complementary to the total house design.

The roofing materials and colours may be selected from the attached Appendix 'B'.

4.6 Windows / Doors

Front entry doors must have a glass light and be sensitive to the French theme. All front facing windows shall conform to a one to two or a two to three proportional rule and have shutters and related trims to represent the French Double casement style.

4.6 Garage / Driveway

Driveways are to be located in accordance to the approved driveway location plan. Attached double front garages are required. The maximum distance between the top of the garage door and the garage eave line should not be more than 2'0". Where the design exceeds this requirement the use of additional architectural feature to reduce the impact is required. The use of a Stockton or similar window panel is required in all garage doors. Driveways are to be concrete or paver stones. The front walkway must be a minimum of poured concrete in broom finish. Individual patio blocks will not be permitted.

The driveway is not to exceed the width of the garage to the garage front where the width may then flare to include a walkway to the front and / or rear yard. A wider driveway may be considered if it can be demonstrated that it does not compromise drainage and not detract from the streetscape and landscaping standards.

Landscaping



5.0 LANDSCAPING

- 5.1 Landscaping Deposit
- a) The Builder shall collect a \$1,000 landscape deposit to ensure landscape compliance.
- b) The landscape deposit will be released only upon fulfillment of the following requirements.

5.2 Landscaping Requirements

A landscaping package for the front yard of each lot will include a MINIMUM of ONE TREE AND FULL SOD ON FRONT YARD, AND TO THE CURB on the roadway. In addition, a prepared shrub bed containing at least 4 shrubs shall be provided. The tree shall be at least $4.5 \, \mathrm{cm} \, (1\, ^3\! 4")$ caliper for deciduous trees and at least $2 \mathrm{m} \, (6.6 \, \mathrm{ft.})$ in height for evergreens trees and the shrubs shall be a minimum of 18" high.

The landscaping must be completed within 120 days of the home being substantially completed. Seasonal deficiencies will be accepted if late fall or winter construction occupancy occurs.

Completion of the landscaping forms part of the final acceptance requirements.

5.3 Fencing

It is recommended that the fencing shall be consistent in design and colour with the fencing style established for the subdivision, see Appendix 'E'.

Interpretation | Siting



6.0 INTERPRETATION

The enforcement, administration and interpretation of these guidelines shall be at the discretion of the Developer or its designated consultant. The unfettered application of these guidelines shall be without notice or precedent.

7.0 SITING

7.1 Consultant

Check with the Architectural Consultant for all applicable drawings, and any special conditions.

7.2 Set Back

A Restrictive Covenant has been registered against title to all Stage 3 lots requiring a minimum 6 meter front yard setback.

7.3 City Regulations

Ensure that city regulations are met and note relevant plans regarding utilities and rights of way.

7.4 Grading

Check Building Grade Plans and conform to them. Do not grade to existing vacant lots or unfinished lanes, but to elevations provided.

7.5 Plot Plans

Plot plans must include the following:

- Scale 1:300 metric.
- North arrow.
- Municipal address.
- Legal description of property.
- All property lines designated and dimensioned.
- Size and location of proposed building(s) dimensioned to property lines, existing building and other structure where applicable.
- All cantilevers (including floor, bay windows, fireplaces, eaves, etc.).
- Abutting streets, avenues, reserves, etc. Easements and utility right-of-way labeled and dimensioned, accurately figured, explicit and complete.
- Spot elevations around building and drainage directions.
- Dimensions from property line to sidewalk and face of curbs.

No construction starts (i.e. stake outs) without written approval of the Developer or Architectural Consultant.

Subdivision Appearance



8.0 SUBDIVISION APPEARANCE

8.1 Signage

In order to maintain cohesiveness for signage within the subdivision, all signage will be supplied by the Developer, i.e: all model signs, directional signs and general information signs. The only signage to be supplied by the Builders Group will be on lots owned or sold by that Builder. Excessive abuse of signage, including sandwich boards may necessitate removal of ALL Builder and Realtor signs.

8.2 Excavation Material

All Builders must ensure that all excavation is kept within the confines of their lot. Any spillage on a road, lane, sidewalk or neighbouring lot must be removed immediately or the Developer will arrange for its removal and invoice for expenses.

8.3 Clean Up

Builders should encourage timely removal by all subtrades of litter on building sites. Failure to comply will result in a clean-up bill being charged to the lot. Supply of bins by the Builder is recommended. Any general clean-up of the subdivision implemented by the Developer can and will be charged pro-rata to all builders.

8.4 Construction Activity

Each Builder is responsible for inspecting the condition of curbs, sidewalks, street lights, services, etc. on his lot and must submit written notice of any damages to the Developer prior to commencing construction, otherwise costs for repairing any damages become the sole responsibility of the Purchaser.

Approval Process



9.0 APPROVAL PROCESS

Prior to building the Builder inspects the lot and all services; all discrepancies or damages to be reported in writing with the application.

Before applying to the City for a development permit, the applicant shall submit plans for approval of WINDWARD LANDTEC INC. Applications shall include the following:

- a) Two complete sets of house plans;
- b) Plot plan, prepared by Pal's Surveys Ltd., showing lot house grades and drainage pattern, floor and garage elevations; and
- c) Completed application form.

WINDWARD LANDTEC INC. will review the plan and recommend approval, modification, or rejection of the application based on the adherence of the plans to these guidelines. This decision should be made within three days of submission. Should disputes arise, the Developer shall make the final decision on the acceptability of plans.

Once approved, WINDWARD LANDTEC INC. will send a copy of the application indicating any changes to the applicant. After approval, the plans may not be altered without prior approval of WINDWARD LANDTEC INC. WINDWARD LANDTEC INC. will keep an up-to-date record of plans showing house types, colour, roof lines and grades, to advise the applicants of how their proposed house will best fit into the existing situation.

The applicant is responsible for notifying WINDWARD LANDTEC INC. that the house is complete and ready for inspection. This notice must be in writing and contain a lot grading certificate, signed by an A.L.S., certifying that the lot has been graded as per approved lot grading plan provided by Challenger. In addition, the applicant must obtain a lot grading inspection report from the City of Beaumont Drainage Branch and provide same to Windward Landtec Inc. Construction will be inspected once completed to ensure compliance with these guidelines. If the lot grading certificate is in order and the landscaping is acceptable, the landscape deposit will be refunded in full.

Approval of any and all house plans will be at the sole and unfettered discretion of the Vendor.

No stake-out granted until approved by WINDWARD LANDTEC INC.

Damage Deposits



10.0 DAMAGE DEPOSITS

A damage deposit in the form of a Letter of Credit in the amount of \$5,000.00 (regardless of the number of lots) is due prior to house plan and grade approval to cover:

- 1. Contravention of architectural objectives.
- 2. Possible damage to:
- a) Curb stop water valve
- b) Sidewalks, curbs and gutters
- c) Driveway aprons and asphalt
- d) Boulevard landscaping and trees
- e) Rear gutters and walkways
- f) Light standards
- g) Fire hydrants
- h) Cathodic Protection points
- i) Grading and drainage swales
- j) Fencing
 - 10.1 Damage Deposit Return Procedure
 - 1. Exterior completed in accordance with these guidelines and as approved by the architectural consultant.
 - 2. Final grading completed and landscaping completed satisfactorily.
 - 3. Grading Inspection Report from the City of Edmonton Drainage Branch.
 - 4. Water valve exposed and marked.
 - 5. Sidewalks, street, lanes, gutters and curbs cleaned.
 - 6. Applications made in writing to WINDWARD LANDTEC INC.







Approved roofing products and colours for Dansereau Meadows

Certainteed	Landmark LT (Lifetime)	Weatherwood, Moire Black Georgetown Grey, Heather Blend
GAF	Tmberline HD	Weatherwood, Charcoal, Slate Pewter Grey, Mission Brown Barkwood
IKO	Cambridge 30	Weatherwood, Driftwood, Charcoal Grey, Dual Black, Heatherwood
	Cambridge LT	Weatherwood, Driftwood, Charcoal Grey, Dual Black
BP	Harmony 30	Stonewood, Twilight Grey, Beachwood Dual Black

Additional Colours and Manufacturers as approved by the Designated Consultant



LOT INSPECTION REPORT

This Lot Inspection Report must be completed by the Builder prior to commencement of construction and emailed to Windward Landtec Inc. at info@windwardlandtec.com with a copy to the Developer at edmonton@anthemproperties.com within SEVEN (7) days of the lot purchase.

Date of Inspection	
Inspected By	
Builder/Purchaser	
Lot	
Block	
Plan	
INSPECTION OF MUNICIPAL IMPROVEMENTS	S
Curb/Gutter/Sidewalk	
Asphalt	
Water Service Valve ("cc")	
Swale	
Boulevard Landscaping	
Light Standard/Communication Pedestal	
Comments	



Sub	division	
Lot	Block	Plan
Hom	eowner	
Mun	icipal Address	

,			Municipa	l Address		
(%)	APPLICANT	INFORMATION				
Name						
Address						
City		PC	Tel		Fax	
Job No						
	HOUSING D	ESIGN				
Туре	Bungalow O	Bi -Level 🔘	Split Level 🔿	Two Sto	rey 🔿	Other
Area	Main Floor	Second Floor		Total Floor 0		Sq.F
Form	Roof Style		Roof Pitch/Slope		Fascia Size	
Exteri	or Detail	Manufacturer	Mate	erial	Colour	
	Roof					
	Wall Balak / Saana					
	Brick / Stone Trim					
	Soffit, Fascia					
	Window		_			
	Front Door					
	Garage Door					
	Chimney					

NOTE:

Colour - Please specify Manufacturer's name, reference number and colour: Example, Olympic 704 Brown Siting and grades as per surveyors plot plan.

Conformance to setback and lot grading requirements are the responsibility of purchaser and /or builder.

USE OF HOUSE PLAN APPROVAL SERVICES


Driveway Border Verandah

The Applicant acknowledges that the house plan approval is provided as a service and that the developer and its designated consultants assume no responsibility for the accuracy of the information provided, or for any losses or damages resulting from use thereof. The applicant further acknowledges that they will hold the developer and its designated consultants harmless from any action resulting from the use of this information.

Date	Signature		Click here to print
12128 - 121A Street Edmonton AlbertaTSL C	A4 Tel. 780 454 6799	Fax: 780.454.6896	email info@windwardlandtec.com



Fencing Colour: Monterey Grey (Cloverdale)

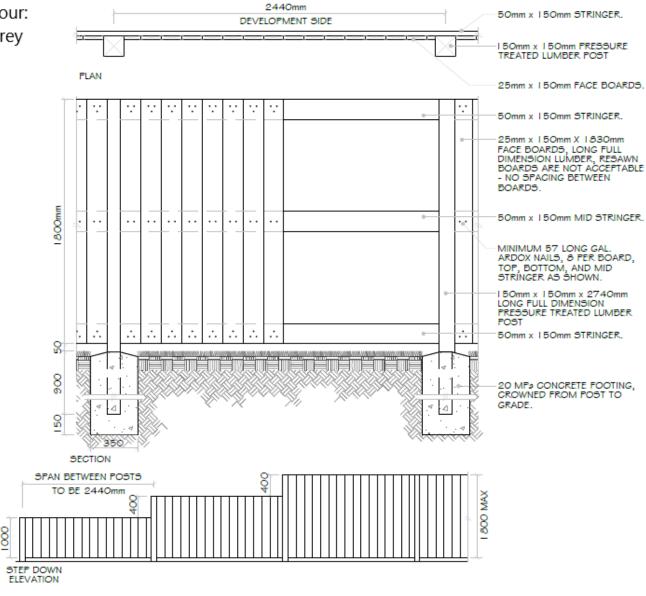

NOTES:

- SPECIFICATIONS: ALL COMPONENTS AND WORKMANSHIP TO CONFORM TO THE TOWN OF BEAUMONT GENERAL DESIGN STANDARDS.
- FENCE TO BE LOCATED I 50mm OFFSET FROM PROPERTY LINE WITHIN DEVELOPMENT SIDE.
 PRE-STAIN TWO COATS ALL WOOD MEMBERS PRIOR TO INSTALLATION, TOUCH UP AFTER CONSTRUCTION.
 WOOD USED MAY BE SPRUCE OR CEDAR DEPENDING ON AVAILABILITY AT TIME OF CONSTRUCTION.
- ALL WOOD CUTS TO BE COATED WITH TWO COATS OF APPROVED WOOD STAIN
- POST HOLES SHOULD BE EXCAVATED TO REACH A DEPTH OF UNDISTURBED SUBGRADE.
 ALL DIMENSIONS ARE IN MILLIMETERS.



1.8m WOOD SCREEN FENCE DETAIL

Scale: N.T.S.





		Civic Address	
Subdivision	Stage	Date of Request	
Builder		Contact E-mail	
Phone	Fax	E-mail	
ensure compliance vimprovements. The fo	with the architectural $arepsilon$	and if applicable, landscaping, a fina guidelines and to check for any c completed prior to a request for final lder)	damages to municipal
✓ Construction and curbs clea ✓ Landscaping c ✓ Grading certif □ Rough □ Final	complete, including seas aned, cc exposed and ma complete in accordance w ficate is attached and Cit	rith the minimum requirements as se	of all debris, sidewalks
Landscaping Deposit F		(Home Owner)	
Date of Request:			
Address of Home:			
Phone:			
☐ Beaum☐ Sherwond ☐ Fort Sa☐ Spruce☐ Stony ☐ I CONF	nont: Final Grade Approvood Park: Final Grade Apville: Rough Grade Certificskatchewan: Final Grade Appole Grove: Final Grade Approversion: Final Grade Approversion: Final Grade Approversion	e Approval & Final Grade Certificate roval & Final Grade Certificate val & Final Grade Certificate LETED THE LANDSCAPING AS PER TH TS.	
Note: if you are not	the original owner you	must include documentation confir	ming that the deposit
was legally transferre	-		,
Further, I/We confirm			
☐ Tree m☐ Shrub	natches the caliper/heigh beds and sod have been	nt as stated in the architectural requi planted as stated in the architectura nd improvements comply with the arch	al requirements
-	spections have stopped,	l 1 to September 30 (weather pending Windward Landtec Inc. will notify	-
NOTE: A re-inspection	n fee will annly for all fail	led inspections	

ARCHITECTURAL DESIGN GUIDELINES 18

Please submit by Fax: 780-454-6896 or by E-mail: info@windwardlandtec.com



Suite 412, 10339-124 Street Edmonton, AB T5N 3W1 Phone 780 421 7272 edmonton@anthemproperties.com